FIG. 1






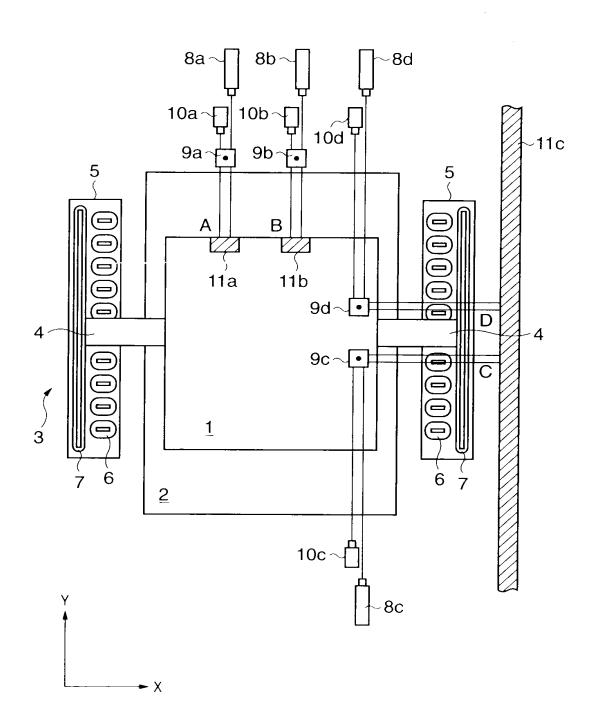


FIG. 2



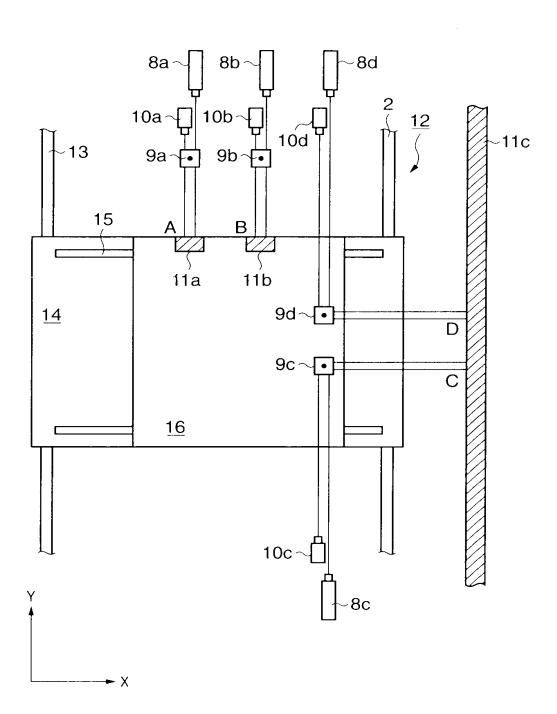

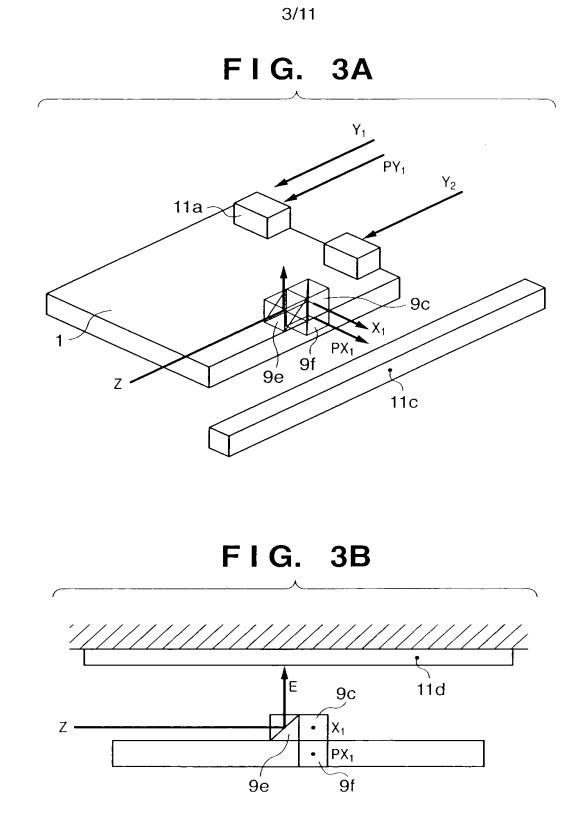

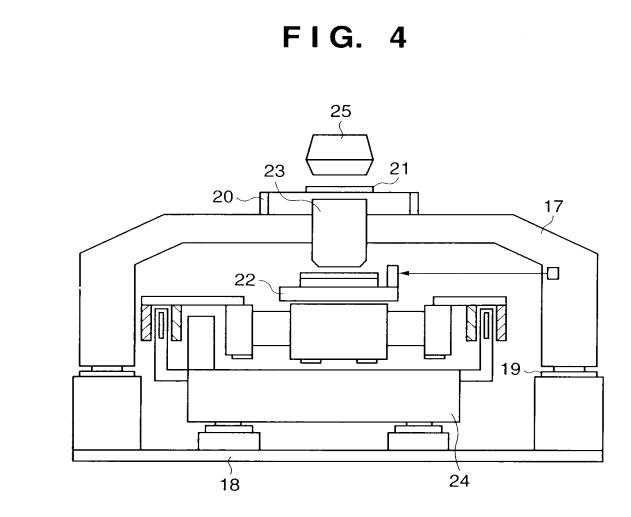

.


4/11

•

.






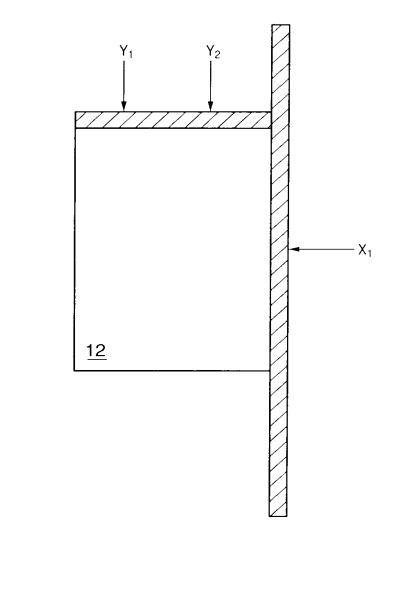

----- X

Y

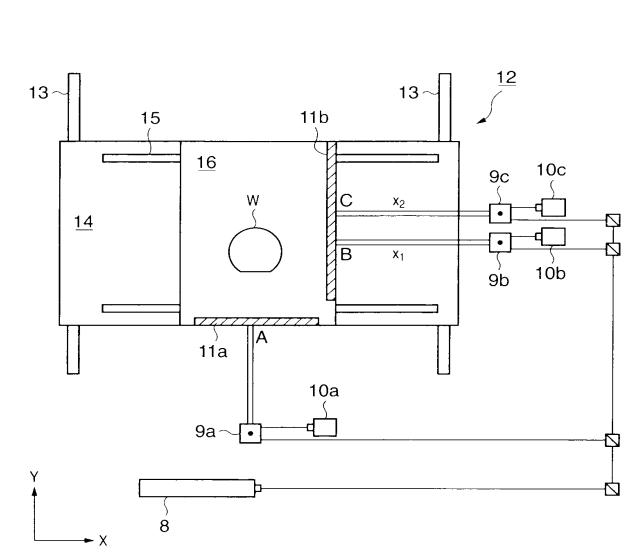



6/11

•

.

rotesc, cossec

•

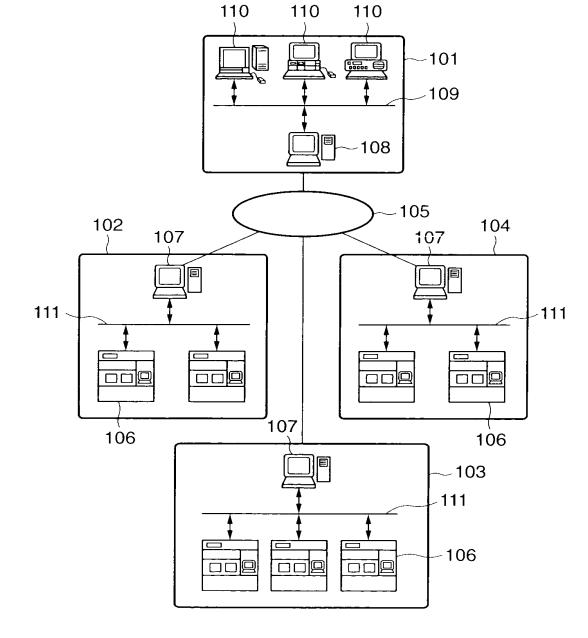


FIG. 7



•

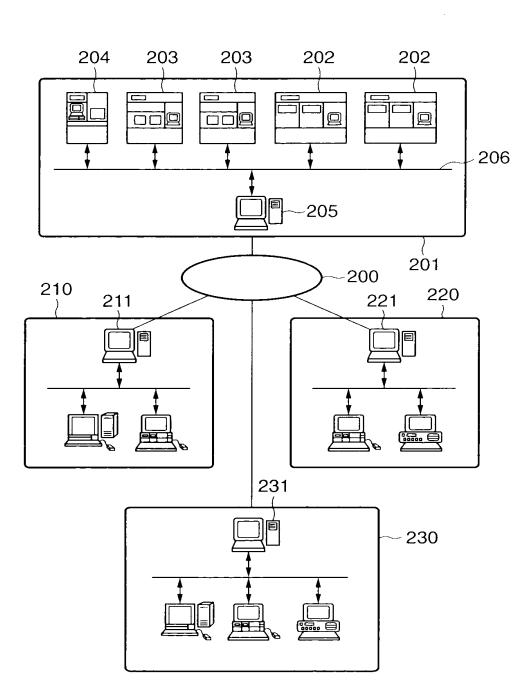


FIG. 8

8/11


9/11

FIG. 9

http://www.maintain.co.jp/db/input.html URL TROUBLE DB INPUT WINDOW OCCURRENCE DATE 2000/3/15 - 404 TYPE OF APPARATUS ******** ~ 401 SUBJECT OPERATION ERROR (START-UP ERROR) -403 APPARATUS S/N 465NS4580001 -402 DEGREE OF URGENCY D ~405 LED KEEPS FLICKERING SYMPTOM -406 AFTER POWER-ON \overline{v} K3+2> Ŷ REMEDY POWER ON AGAIN (PRESS RED BUTTON IN ACTIVATION) 407 $\langle 2 \rangle$ PROGRESS INTERIM HAS BEEN DONE $\hat{\mathbf{v}}$ -408 $\overline{\nabla}$ रिन्स् <u>{</u> (SEND) (RESET) 410 411 412 LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY **OPERATION GUIDE**

.


FIG. 10

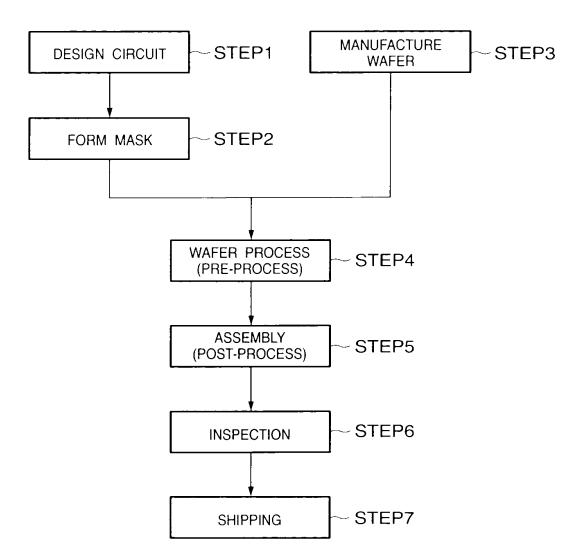

SEMICONDUCTOR DEVICE MANUFACTURING FLOW





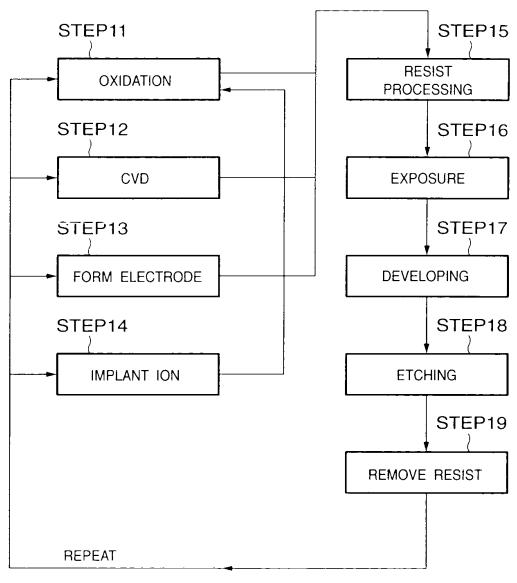

· .